

INSTALLATION INSTRUCTION FOR 4172

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off the power at the circuit breaker and remove old fixture, including the mounting hardware.

ASSEMBLING THE FIXTURE

3. Thread the nut (G) onto the nipple (H) and through the cap (F) thread the nipple (H) into the saddle (E) and tighten with the nut (G).
4. Slide the tube (I), cap (J), iron washer (K), plastic washer (L), glass (M), plastic washer (N) and iron washer (O) over the nipple (H) and secure with the nut (P).
5. Slide the cap (Q), cap (R) over the nipple (H), and secure with the cap (S).

MOUNTING THE FIXTURE (Fig.1)

6. Insert junction box screws (A) (Size:#8-32*0.6"L) into the circular strap (B), Secure circular strap (B) with junction box screws (A). The side of the mounting bar marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

7. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire directly to the mounting plate using the green screw provided. After the wires are connected, tuck them carefully inside the outlet box.

COMPLETING THE INSTALLATION

8. Raise the ceiling cap (D) over the circular strap (B), and then secure it with mounting screws (C) (Size:#8-32*0.5"L).
9. Install the light bulb(s) in accordance with the fixture's specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)** (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).

Your installation is now complete. Return the power to the junction box and test the fixture.

Fig.1

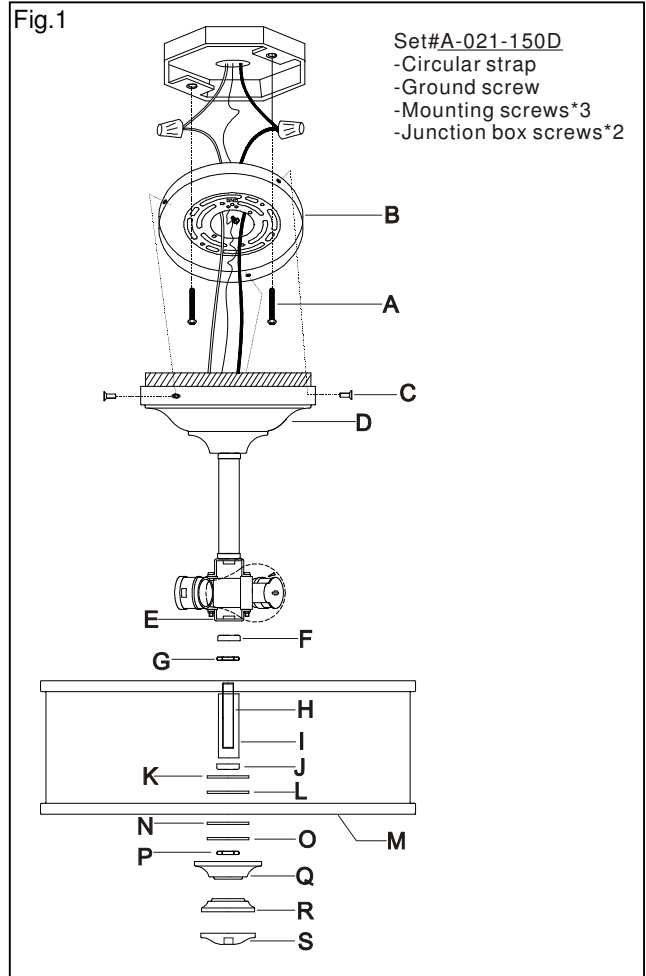


Fig.2

